


NITEGLOW® SAFETY NOSING

NITEGLOW® TREADS PROVIDE:

Super bright, long after glow Photoluminescent (glow--in-the-dark) stair nosing that meet NYC Local Law 26 code compliance. These nosings are used for exit path markings, steps and leading edge of landings when finding pathways in the dark is a necessity. The use of heat treated corrosion resistant aluminum substrate with especially formulated Photoluminescent filler assures long tread life under heavy pedestrian traffic. NITEGLOW® safety surfaces have easy maintenance features.


NITEGLOW® FEATURES:

- Mill finish extruded aluminum base
- Lengths to order - up to 12'0" max
- Super bright long lasting photoluminescent
- High content of aluminum oxide abrasive
- Clean architectural lines
- Protective tape available
- Sure-hold anchor
- Smooth Photoluminescent glow area

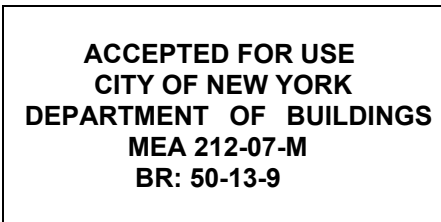

Type XT3-NGS

3" wide, 3/16" thick, nose, 1" wide glow area
DRAWING NOT TO SCALE

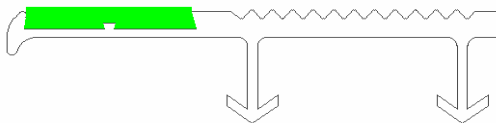

Detail - sure hold anchor in concrete step

GUIDELINES FOR THE INSTALLATION OF METAL SAFETY TREADS OR NOSINGS INTO NEW CONCRETE OR STEEL PAN FILLED STAIRS:

The use of very large aggregate in the concrete mix may make placement of the safety nosing difficult.

Safety nosing placement may be difficult in concrete with very low slump.

Place concrete into the stair forms or steel pans as quickly as possible; schedule pours so as to install the metal safety nosings quickly before initial set of concrete occurs.

Puddle the concrete; tamp the safety nosing to insure proper concrete formation around the anchors.

Remove protective tape (if used) as soon as practical.

Order nosings or treads well in advance of the pour or installation date.

Close stairway after pour; permit no use for 24 hours.

NITEGLOW SPECIFICATION:

- Provide XT3-NGS safety nosings as manufactured by Wooster Products Inc. for interior stairs.
- Comply with all requirements of New York City local law 26 (2004) RS 6-1 and RS 6-1A, viz., flammability (ASTM D635-2003), toxicity (SMP 800C), washability (ASTM 4828-1994), radioactivity (ASTM D 3684-2004) and brightness (ISO 17398-2004).
- Nosing base shall be type 6063-T5 extruded aluminum.
- Back area to be integrally designed anti-slip ribbed surface.
- Photoluminescent epoxy binder in the front area is to be a fully cured resilient type epoxy; epoxy binder to filler ratio to be 24% minimum for excellent cleanability.
- Photoluminescent epoxy filler (free of hazardous and radioactive substance) shall extend uniformly throughout the filler.
- Nosings shall terminate not more than 4" from ends of steps for poured concrete stairs; for concrete filled steel pan stairs, nosings shall be full length of steps less 1/8" clearance.
- Nosings shall finish flush with the top of the traffic surface.
- Smooth Photoluminescent glow area with excellent cleanability. Highest possible score of 10 on the ASTM D4829 test..

WOOSTER PRODUCTS INC, 1000 SPRUCE ST., WOOSTER, OH 44691

Toll Free: 800-321-4936

Phone: 330-264-2844

Fax: 330-262-4151

Web Site: <http://www.wooster-products.com>

E-mail: sales@wooster-products.com